


T M U X : 3-port Transmission/Reflection Filter Module

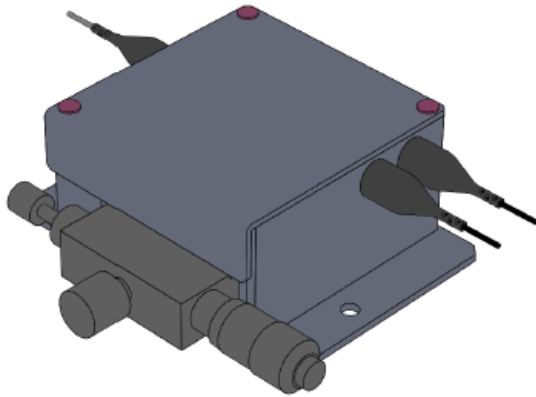




- Transmission light or reflection light is sharply extracted.
- The extrated light is tunable (a tunable range of 10nm).
- The tuning range is customizable.

Specifications	
Wavelength tuning range	10nm
Insertion loss	≤ 2.2 d B (Transmission, Reflection)
Filter	FWHM 5nm, 2 Cavity ※Others(BPF, LPF, SPF, etc.) are available.
Fiber type	SMF ※Others (PMF, DSF, etc.) are also available.
Fiber connector	FC/SPC ※Others (SC, APC, etc.) are also available.
Size	W51 x D50 x H27.5 mm

○Application

- A equipment for the optical fiber sensing and communication
- ADD/DROP Module
- Channel Dividing

※Specification may be changed without a preliminary announcement.

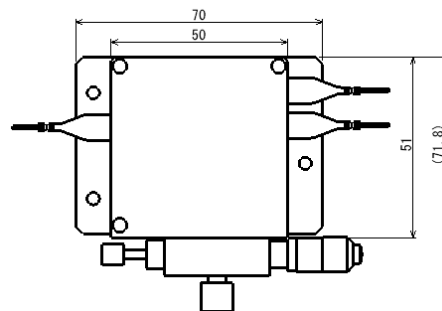

For Inquiries Yamaichi Electronics Group



Sales Department
 69-3 Bodai Hadano-shi Kanagawa, 259-1302 JAPAN
 TEL: +81-463-75-5196 FAX: +81-463-75-3535
 E-mail: sales@koshin-kogaku.co.jp
 URL: http://www.koshin-kogaku.co.jp



Head Office Sales Department
 11F Technoport Mitsui Seimei Bldg. 2-16-2, Minamikamata,
 Ota-ku, Tokyo 144-8581, JAPAN
 TEL: +81-3-3778-6155 FAX: +81-3-3778-6177
 URL: http://www.yamaichi.co.jp